PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5:

B41F 13/10, 27/12

(11) International Publication Number: WO 91/04155

(43) International Publication Date: 4 April 1991 (04.04.91)

(21) International Application Number: PCT/SE90/00568
(22) International Filing Date: 6 September 1990 (06.09.90)

(30) Priority data: 8903004-3 13 September 1989 (13.09.89) SE

(71) Applicant (for all designated States except US): MILLER GRAPHICS AKTIEBOLAG [SE/SE]; Brarudsallén, S-686 00 Sunne (SE).

(72) Inventors; and
(75) Inventors/Applicants (for US only): PERSSON, Rolf, S. [SE/SE]; Pl 3233, S-686 00 Sunne (SE). JANSON, Per-Olof [SE/SE]; Frödingsvägen 10, S-686 00 Sunne (SE).


(74) Agent: HYNELL, Magnus; Hynell Patenttjänst AB, Box 236, S-683 02 Hagfors (SE).

(81) Designated States: AT, AT (European patent), AU, BB, BE (European patent), BF (OAPI patent), BG, BJ (OAPI patent), BR, CA, CF (OAPI patent), CG (OAPI patent), CH, CH (European patent), CM (OAPI patent), DE (Utility model)*, DE (European patent)*, DK, DK (European patent), ES, ES (European patent), FI, FR (European patent), GA (OAPI patent), GB, GB (European patent), HU, IT (European patent), JP, KP, KR, LK, LU, LU (European patent), MG, ML (OAPI patent), MR (OAPI patent), MW, NL, NL (European patent), NO, RO, SD, SE, SE (European patent), SN (OAPI patent), SU, TD (OAPI patent), TG (OAPI patent), US.

Published

With international search report. In English translation (filed in Swedish).

(54) Title: PRINTING ROLL CORE

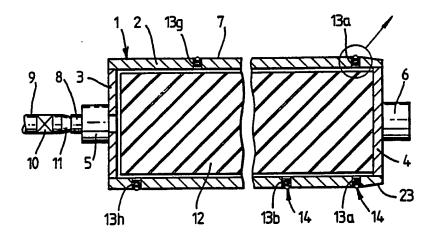

(57) Abstract

A printing roll core for a printing roll comprising such a core (1) and a sleeve (22) which is provided to be mounted on the core from one end thereof and to be displaced along the core to and from working positions on the core by causing compressed air to flow out through passages (13a-13h) terminating in outlets distributed along the outer surface of the core, so that the sleeve from a state in which the sleeve tightly fits the core, when compressed air is not caused to flow through said outlets, may be expanded by causing air to flow through said outlets, so that the sleeve may be displaced along the core. The passages may be connected to a source of compressed air which preferably are common for said passages. In each of said passages is provided a valve (14) and each such valve includes an opening member (17, 19) having an outer portion (19) extending beyond the outer surface (7) of the exterior portion (2) of the core when the valve is closed and said outer portion is in its outer position, said outer portion being displaceable through outer mechanical action from said outer position to an inner position essentially interior of or coinciding with the outer surface of the core, wherein the valve is opened such that compressed air may flow out through the opening in the surface of the core, said mechanical action being performed by the sleeve as said sleeve is being mounted on the core, wherein the valves are successively opened as the sleeve is brought into contact with their outer portions and are closed again when the sleeve has passed the opening in question.

DESIGNATIONS OF "DE"

Until further notice, any designation of "DE" in any international application whose international filing date is prior to October 3, 1990, shall have effect in the territory of the Federal Republic of Germany with the exception of the territory of the former German Democratic Republic.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

ΑT	Austria	ES	Spain	MC	Monaco
AU	Australia	FI	Finland	MG	Madagascar
BB	Barbados	FR	France	ML	Mali
BE	Belglum	GA	Gabon	MR	Mauritania
BF	Burkina Fasso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GR	Greece	NL	Netherlands
BJ	Benin	HU	Hungary	NO	Norway
BR	Brazil	ΙT	Italy	PL	Poland
CA	Canada	JP	Japan	RO	Romania
CF	Central African Republic	KP	Democratic People's Republic	SD	Sudan
CG	Congo		of Korea	SB	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
СМ	Cameroon	LI	Liechtenstein	SU	Soviet Union
DE	Germany	LK	Sri Lanka	TD	Chad
DK	Denmark	LU	Luxembourg	TG	Togo
			-	US	United States of Americ

PRINTING ROLL CORE

TECHNICAL FIELD

This invention relates to a printing roll core for a printing roll comprising such a core and one or more sleeves which are provided to be mounted on the core from one end thereof and to be displaced along the core to and from working positions on the core by causing compressed air to flow out through passages terminating in outlets distributed along the outer surface of the core, so that the sleeve from a state in which the sleeve tightly fits the core, when compressed air is not caused to flow through said outlets, may be expanded by causing air to flow through said outlets, so that the sleeve may be displaced along the core.

15

20

25

30

35

BACKGROUND OF THE INVENTION

Printing roll cores of the above mentioned type are known since long and are extensively used within the graphic industry. For example may be mentioned those printing roll core designs which are described in US-A-3 146 709 and G-A-1 581 232. A drawback of these known printing roll cores is that compressed air is flowing out through all the outlets in the surface of the core when the sleeve is being mounted on the core or is being removed from it. In order that this known system shall function it has therefore been necessary to concentrate the majority of the outlets to a region of the surface of the core adjacent to that end of the core where the mounting operation is initiated, while only one single outlet is located at the central part of the surface of the core. The reason for this that the sleeve already initially shall be caused to cover the majority of the outlets through which compressed air is caused to flow out since the fall of pressure otherwise would be so large that the sleeve would not be able to be sufficiently expanded. This compromise, however, means that a plurality of sleeves cannot be mounted side by side on one and the same core, which is a serious limitation since it is often desirable to make a plurality of printings side by side in one and the same printing unit. Another drawback is that a sleeve which by mistake has

4

been displaced so far along the core that it has passed the central outlet will be locked on the core without any possibility to be released.

5 BRIEF DISCLOSURE OF THE INVENTION

The purpose of the invention is to provide an improved printing roll core, in which the above mentioned drawbacks and limitations have been eliminated in a simple way. These and other objectives may be achieved therein that the invention is characterized by what is stated in the appending claims.

Further characteristic features, aspects and advantages of the invention will be apparent from the following description of a preferred embodiment.

15

10

BRIEF DESCRIPTION OF DRAWINGS

In the following description of a preferred embodiment reference will be made to the accompanying drawings, in which

- 20 Fig. 1 is a longitudinal sectional view through a printing roll core according to the invention;
 - Fig. 1A shows an encircled detail of Fig. 1 at a larger scale;
- 25 Fig. 2 shows the same printing roll core as in Fig. 1 with a sleeve partly mounted on the core; and
 - Fig. 3 shows a printing roll core with a plurality of sleeves mounted side by side on the core.

30

35

DESCRIPTION OF PREFERRED EMBODIMENT

A printing roll core has been generally designated 1. It consists according to the embodiment of a cylindrical shell 2 (also a slightly tapered core may be conceived) and two end portions 3 and 4 provided with axle bars 5 and 6. The cylindrical outer surface of the shell 2 has been designated 7. Compressed air can be supplied from a source of

5

10

. 15

20

25

30

35

compressed air through a compressed air hose 9 via a connection nozzle 8 in axle bar 5. In hose 9 there may optionally be provided a valve for opening and closing the connection. The supply of compressed air may be effected either by opening the valve 10 or by connecting the mouth piece 11 of hose 9 to the connection nozzle 8 of the axle bar 5. When closing the supply the operation is reverse. In the interior of the printing roll core 1 is a fill body 12 of rigid cellular plastic material which reduces the air volume in the interior of the core to the thin gaps between on one side the shell 2 and the end portions 3 and 4, and on the other side the said fill body 12.

In the shell 2 there are in a manner known per se provided a number of passages 13a, 13b ... 13h. In each such passage is a nonreturn valve 14. More particularly the valve 14 is a ball valve of well known type, as is shown in Fig. 1A. In the passage 13a there is provided a valve seat 15 having an outer annular border line which essentially coincides with the outer surface 7 of the shell. A steel ball 17 is pressed towards the seat 15 by means of a spring 18. In the closing position of the valve the ball 17 extends beyond the outmost part of the valve seat 15 and also beyond the outer surface of the shell 2 by an outer portion 19 which has the shape of a spherical calotte.

The sleeve - or the sleeves - which shall be mounted on the printing roll core 1 may be designed in a manner per se and consist of an inner shell 20 of reinforced plastics and an outer tube 21 of rubber with an exterior cliché. The sleeve has been generally designated 22, Fig. 2. When the sleeve 22 shall be mounted on the core 2 the compressed air hose 9 is connected to the nozzle 8, and the valve 10 is opened so that the interior of the core is subjected to an overpressure. No air, however, can flow through the passages 13a-13h as the valves 14 are closed. The sleeve 22 is mounted, starting in the right hand portion of the core 2, which portion in this case is the initial mounting end. The end portion 23 therefore suitably is somewhat tapered in order to facilitate the initial mechanical mounting operation. When the sleeve 22 thus has been mounted so far that it has passed the tapered portion 23, the sleeve 22 will with its interior side press the balls 17 of

\$

the valves 14 into the passages 13a under compression of spring 18. Herein the valves are opened in a manner known per se and air flows out through the outlets of these first passages 13a such that the sleeve 22 will be expanded to a sufficient degree in order that it readily may be further moved over the core 2. The other valves 14, i.e. the valves in passages 13b-13h, are still closed but they will successively be opened as they are covered by the sleeve 22 during the continued movement of the sleeve along the core 2.

Fig. 3 illustrates the case when a plurality of sleeves 22a, 22b, 22c, and 22d are mounted on a core 1. This may be made without problems according to the invention as the shell 2 of the core 1 may be provided with a plurality of valve provided passages 13a-13h. These has been indicated in Fig. 1 only by an X. It is also possible according to the invention to provide only one or a couple of comparatively short sleeves on a comparatively long core 1, so that the sleeves only will cover a minor portion of the core, a possibility which sometimes is worthwhile.

CLAIMS

5

10

15

20

25

30

35

3

1. Printing roll core for a printing roll comprising such a core (1) and a sleeve (22) which is provided to be mounted on the core from one end thereof and to be displaced along the core to and from working positions on the core by causing compressed air to flow out through passages (13a-13h) terminating in outlets distributed along the outer surface of the core, so that the sleeve from a state in which the sleeve tightly fits the core, when compressed air is not caused to flow through said outlets, may be expanded by causing air to flow through said outlets, so that the sleeve may be displaced along the core, characterized in that said passages may be connected to a source of compressed air, which preferably is common for said passages, that a valve (14) is provided in each of said passages, and that each such valve includes an opening member (17, 19) having an outer portion (19) extending beyond the outer surface (7) of the exterior portion (2) of the core when the valve is closed and said outer portion is in its outer position, said outer portion being displaceable through outer mechanical action from said outer position to an inner position essentially interior of or coinciding with the outer surface of the core, wherein the valve is opened such that compressed air may flow out through the opening in the surface of the core, said mechanical action being performed by the sleeve as said sleeve is being mounted on the core, wherein the valves are successively opened as the sleeve is brought into contact with their outer portions and are closed again when the sleeve has passed the opening in question.

- 2. Printing roll core according to claim 1, c h a r a c t e r i z e d in that the valves consist of ball valves, said outer portion consisting of a portion of the ball.
- 3. Printing roll core according to claim 1, c h a r a c t e r i z e d in that in the interior of the core there is provided a fill body (12) which reduces the air volume of the core to a space between on one side the shell and the two end portions (3, 4) of the core and on the other side said fill body (12).

INTERNATIONAL SEARCH REPORT

International Application No PCT/SE 90/00568

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁸										
According to Inter	national Patent Classification (IPC) or to both h	lational Classification and IPC								
11PC5: B 41 F	13/10, 27/12 ————————————————————————————————————									
II. FIELDS SEARC										
	Minimum Docume									
Classification System	m	Classification Symbols								
IPC5	B 41 F									
	Documentation Searched other	r than Minimum Documentation s are Included in Fields Searched ⁸								
SE,DK,FI,NO classes as above										
III. DOCUMENTS	CONSIDERED TO BE RELEVANTS									
	ation of Document, ¹¹ with indication, where ap	propriate, of the relevant passages ¹²	Relevant to Claim No.13							
	, 403454 (TETRA PAK INTERN	ATIONAL AB)	1-3							
2	1 August 1978,									
] s	see the whole document									
]										
Y SE, E	3, 436717 (O.Ö. JOHNSSON) 2	1 January 1985,	1-3							
s	ee abstract; figures 1-3									
										
		•								
i l										
* Special catego	ries of cited documents: ¹⁰ fining the general state of the art which is not be of particular relevance	"T" later document published after or priority date and not in confl cited to understand the principl	the international filing date ict with the application but e or theory underlying the							
considered to	o be of particular relevance nent but published on or after the international	invention								
		involve an inventive step								
citation or or	lich may throw doubts on priority claim(s) or d to establish the publication date of another her special reason (as specified) ferring to an oral disclosure, use, exhibition or	"Y" document of particular relevant cannot be considered to involve document is combined with one ments, such combination being	e, the claimed invention an inventive step when the or more other such docu- obvious to a person skilled							
other means		in the art.								
	blished prior to the international filing date bu e priority date claimed	"&" document member of the same	patent termiy							
Date of the Actual C	ompletion of the International Search	Date of Mailing of this International S	earch Report							
27th Novembe		1990 -12- 0	7							
International Search	ing Authority	Signature of Authorized Officer								
	TOTOU DATEMY OFFICE	Hans Peterson	~							
Form PCT/ISA/210 (se	DISH PATENT OFFICE cond sheet) (January 1985)	Halls receiped								

AN'NEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO.PCT/SE 90/00568

32

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the Swedish Patent Office EDP file on 90-11-01 The Swedish Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

c	Patent document ited in search report	Publication date	Paten men	t family nber(s)	Publication date
SE-B-	403454	78-08-21	NONE		
SE-B-	436717	85-01-21	SE-A-	8007733	82-05-05
					·
		·			
				·	
	-				
		•			